

# AUSTAL JHSV



YARD NO : US630 - 638

DESTINATION : USA

DELIVERY : 2012 - 2016

CLIENT : US NAVY

## PRINCIPAL DIMENSIONS

Material	Hull and superstructure - aluminium alloy
Length overall	103 metres (337.9ft)
Beam overall	28.5 metres (93.5ft)
Hull draft (maximum)	3.83 metres (12.57ft)

## MISSION BAY

Area (with tie-downs)	1,863m <sup>2</sup> (29,053ft <sup>2</sup> )
Clear Height	4.75m (15.6ft)
Turning diameter	26.2m (86.0ft)
ISO TEU Stations	6 Interface Panels

## ACCOMMODATIONS

Crew	41
Single SR	2
Double SR	6
Quad SR	7
Troop Seats	312
Troop Berths	
Permanent	104
Temporary	46
Galley and Messing	48

## PROPULSION

Main Engines	4 x MTU 20V8000 M71L Diesel Engines 4 x 9.1 MW
Gear boxes	4 X ZF 60000NR2H Reduction Gears
Waterjets	4 Wartsila WLD 1400 SR

## PERFORMANCE

Speed	
Average	35 knots @ 90% MCR with 635 mt (700st) payload
Maximum	43 knots without payload
Range	
Maximum Transit	1200nm
Self-Deployment	5600nm
Survival Through	SS-7

## AVIATION FACILITIES

NAVAIR Level 1 Class 2 Certified Flight Deck for one helicopter  
 Centreline parking area for one helicopter  
 NAVAIR Level 1 class 4 Type 2 Certified VERTREP  
 Helicopter Control Station




## AUXILIARY SYSTEMS

Active Ride Control  
 Transcom Interceptors  
 Foils: 3.24m<sup>2</sup> (34.9ft<sup>2</sup>) each, forward  
 on inboard sides of demi-hulls  
 Vehicle Ramp  
 Articulated Slewing Stern Ramp  
 Straight aft to 45 Starboard  
 Telescoping Boom Crane  
 12.3mt @15m, 18.2 mt @10m  
 (13.6Lt @ 49.2 ft, 20.1 Lt @ 32.8 ft)

# AUSTAL JHSV

Vessel type: Joint High Speed Vessel

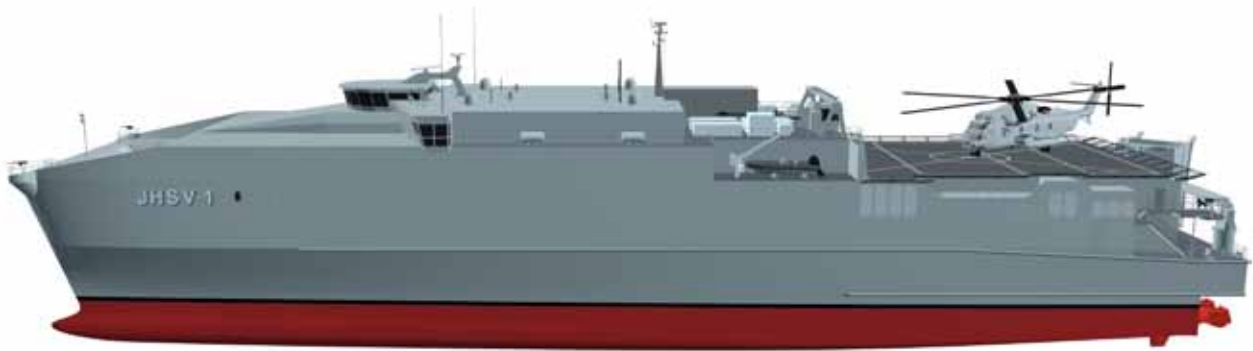

YARD NO : US630 - 638  
AUSTAL JOINT HIGH SPEED VESSEL

DESTINATION : USA

DELIVERY : 2012 - 2016

CLIENT : US NAVY

SHIPS • SYSTEMS • SUPPORT

[WWW.AUSTAL.COM](http://WWW.AUSTAL.COM)

